



Flow Group - Brass

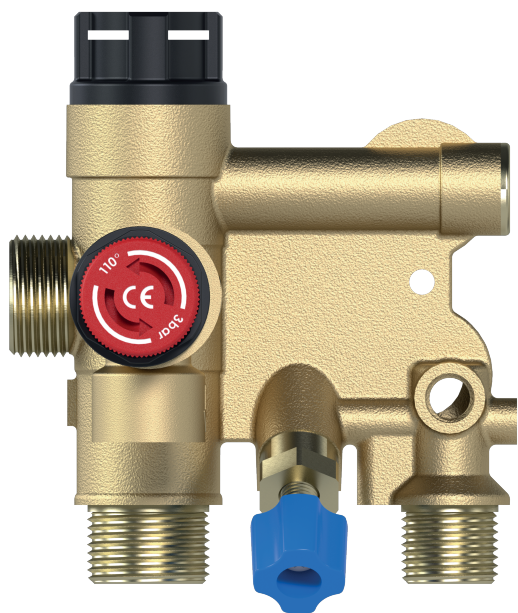

Key Features

Bypass	Integrated
Bypass Value	400±50mbar
Body Brass	CW617N
CH Flap Open Value	0,7±0,1bar
Safety Valve	Caleffi
Safety Valve Connection	G ½" Female
Safety Valve Open	3±0,3bar
Safety Valve Close	2,7±0,2bar
Shaft	SS304
Spring	SS304
O-Rings	EPDM – LAV.EL GOMMA
Connection-CH	Circle G ¾"
Connection-DHW	Circle G ½"
Port	G ⅛"
Port Inlet	G ¾"
Filling Tap	Brass CW617N

Return Group Brass

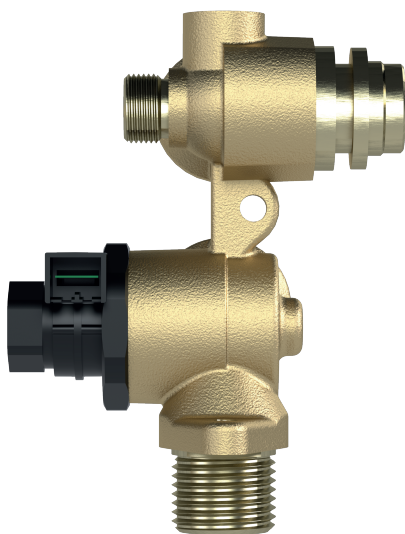

Key Features

Body Brass	CW617N
Flow Control	Check Doc FLC1
O-Rings	EPDM – LAV.EL GOMMA
Connection-DHW	Circle G ½"
Port Up	G ¼"
Port Side	G ½" Female
Port Outlet	Pump
Flow Limitor	opt. 9-10-12-14lt – Tecno Alfa
Filter	POM